



TK Series

Designed for tough industrial environments and a wide variety of applications, TK Enclosures are available with standard gray or tinted transparent covers in several heights. Sidewalls are supplied smooth or with knockouts. Precision molded from impact and flame resistant materials, they offer functionality and appealing solutions for diverse application requirements.

- 16 different enclosures with up to 3 different cover heights
- IP66 (NEMA 4X)
- Polystyrene or Polycarbonate
- Gray or tinted transparent covers
- Smooth sidewalls or sidewalls with knockouts
- Four cover mounting screws
- Tongue and groove with polyurethane gasket (CFC free)
- Gasket inserted by robots
- HF - EMC models available
- Knockout mounting holes in enclosure base
- Screw fastening cover design requires six turns to lock
- Dust and moisture proof
- Non flammable and halogen free

The TK Choice

Sample application.




Different cover heights.



Combinable





External hinges

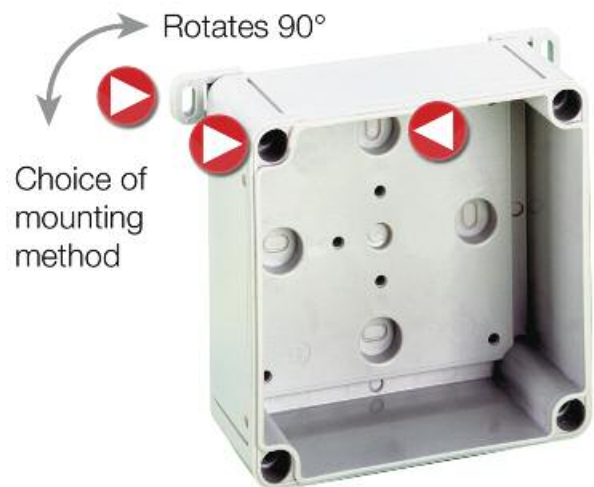


Rotates 90°

Choice of
mounting
method

Dimensions

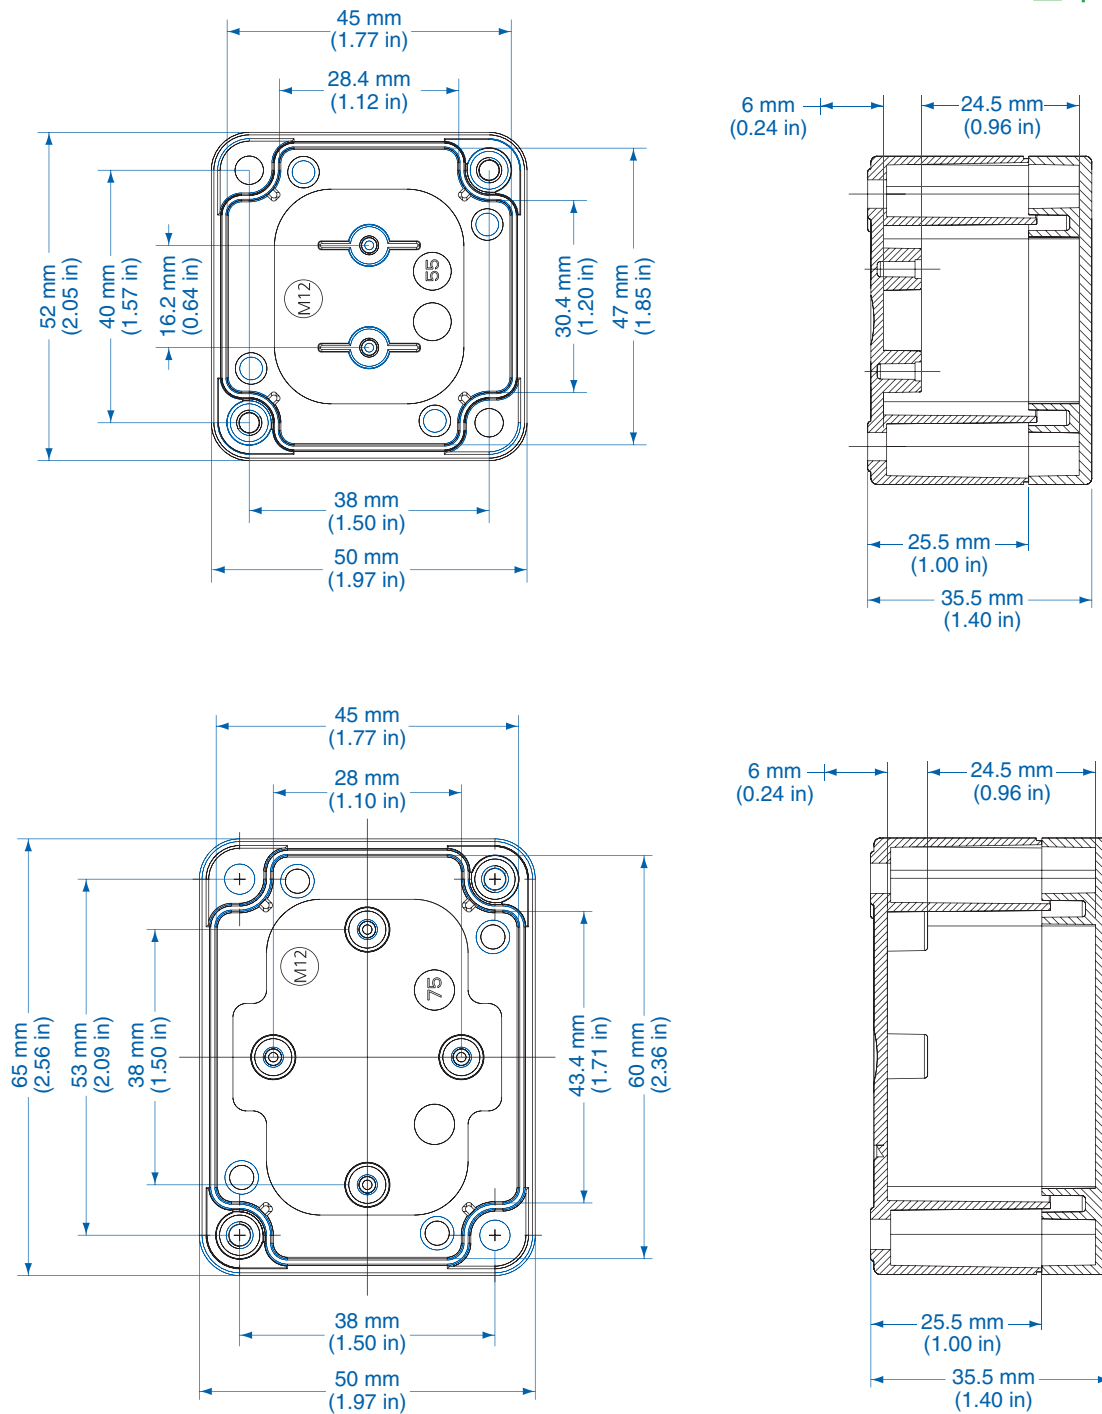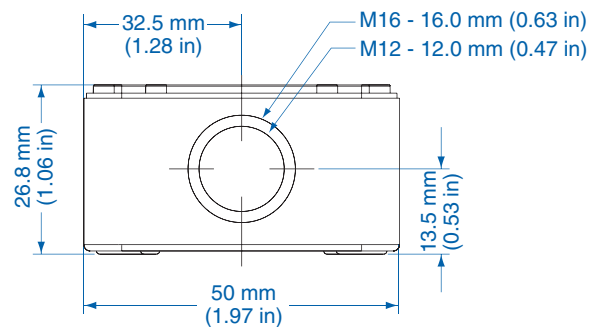

Knockout Positions
 (one side only)


Dimensions

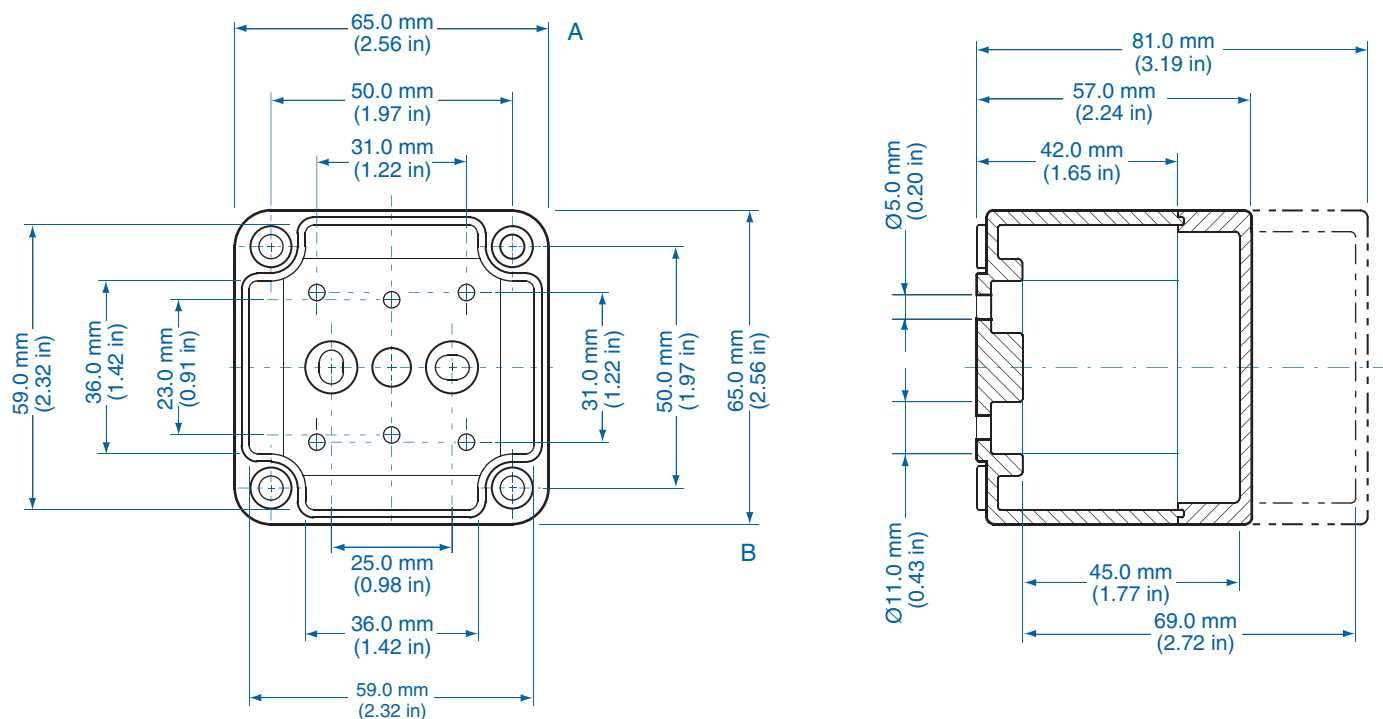


Knockout Positions

(all 4 sides)

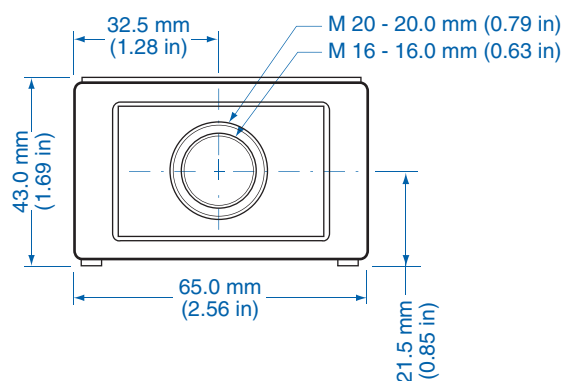


Dimensions

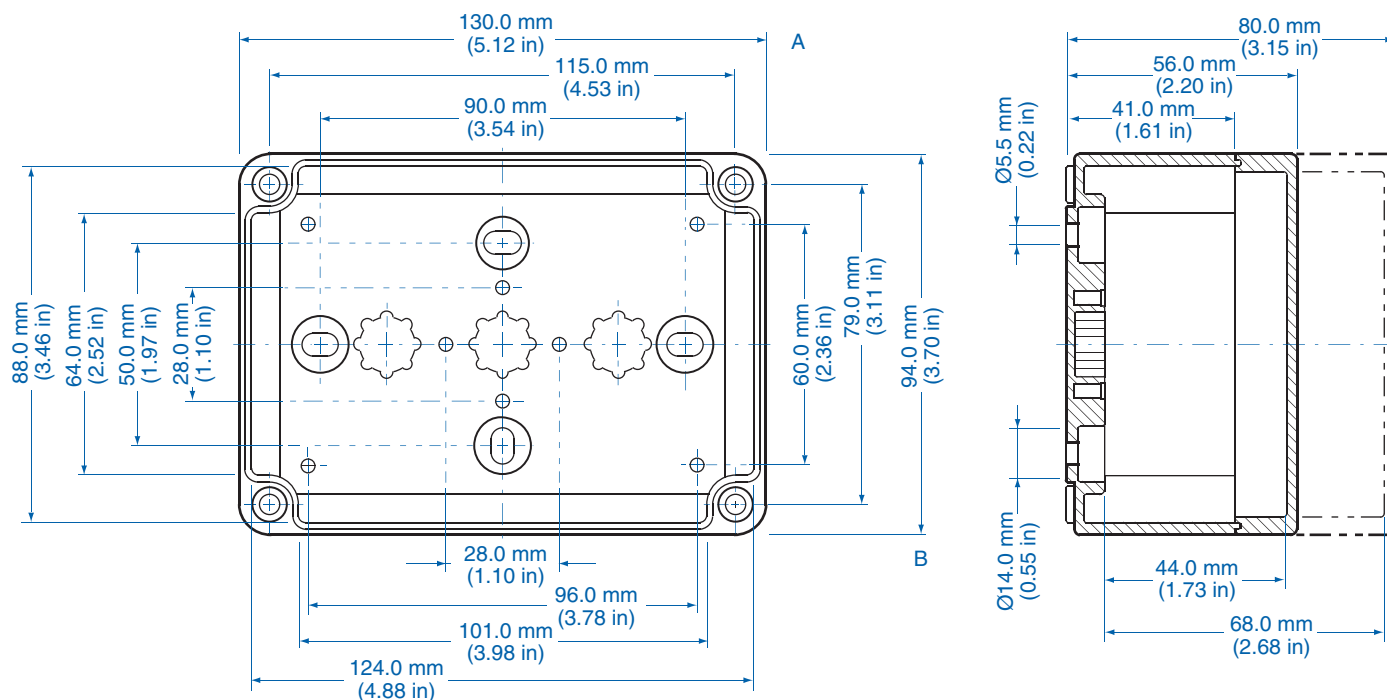


Knockout Positions


Side A

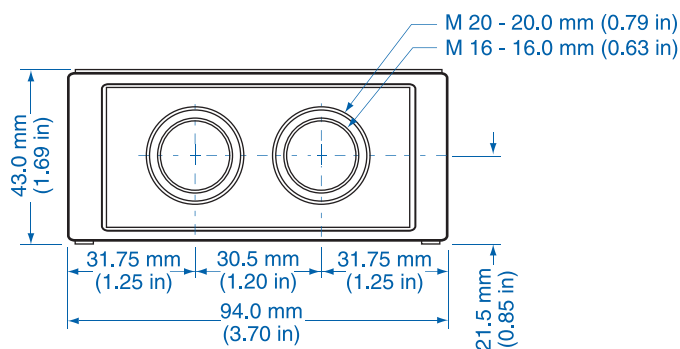


Side B

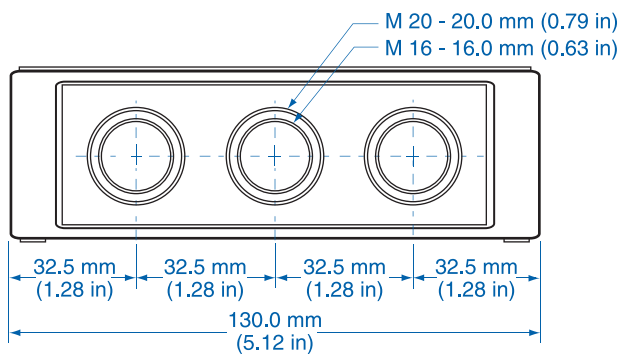


Dimensions

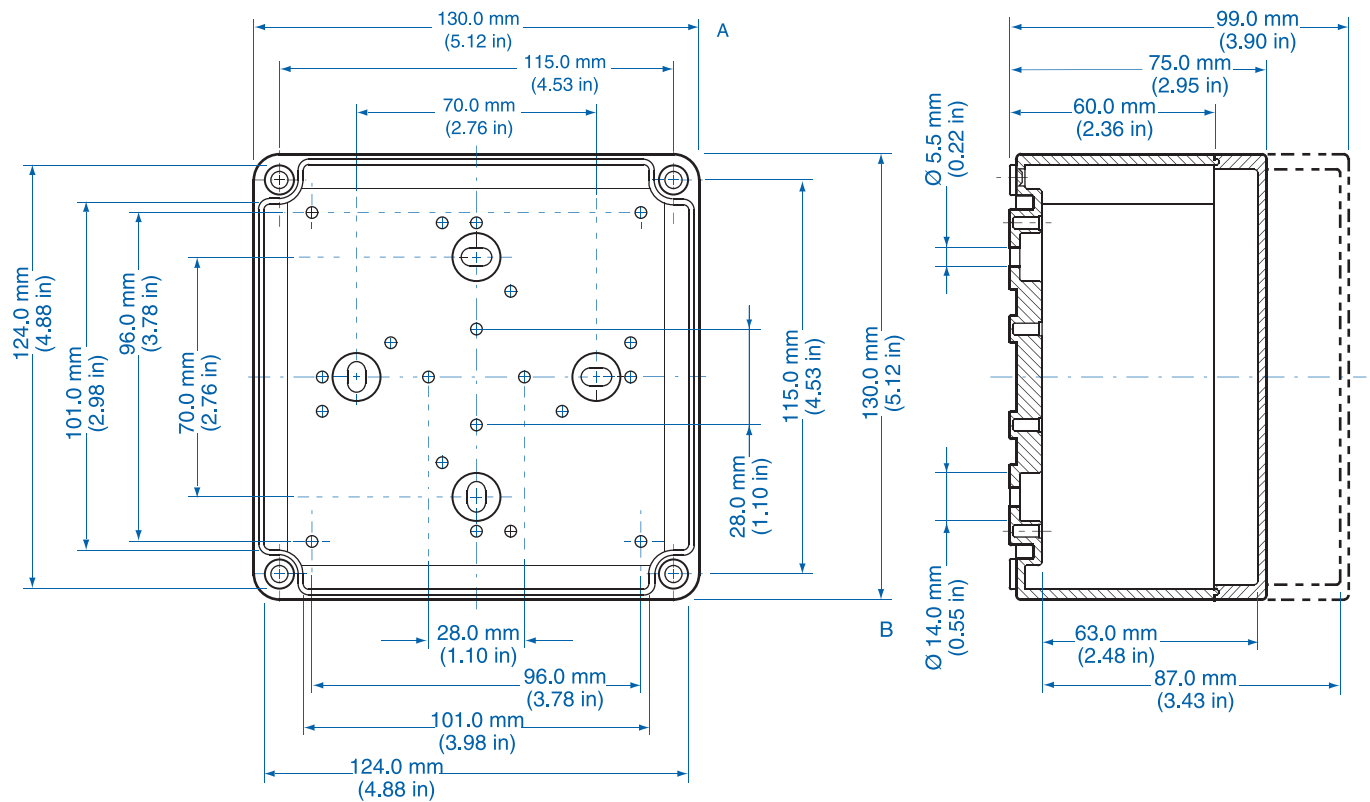

Knockout Positions

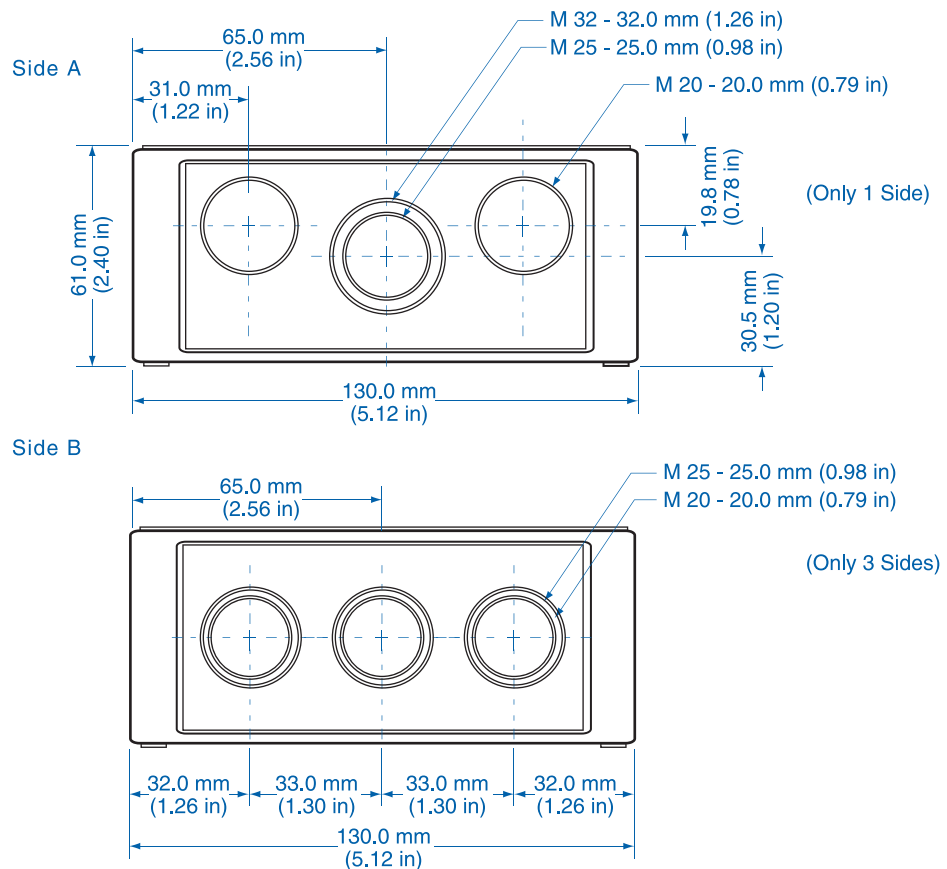


Dimensions

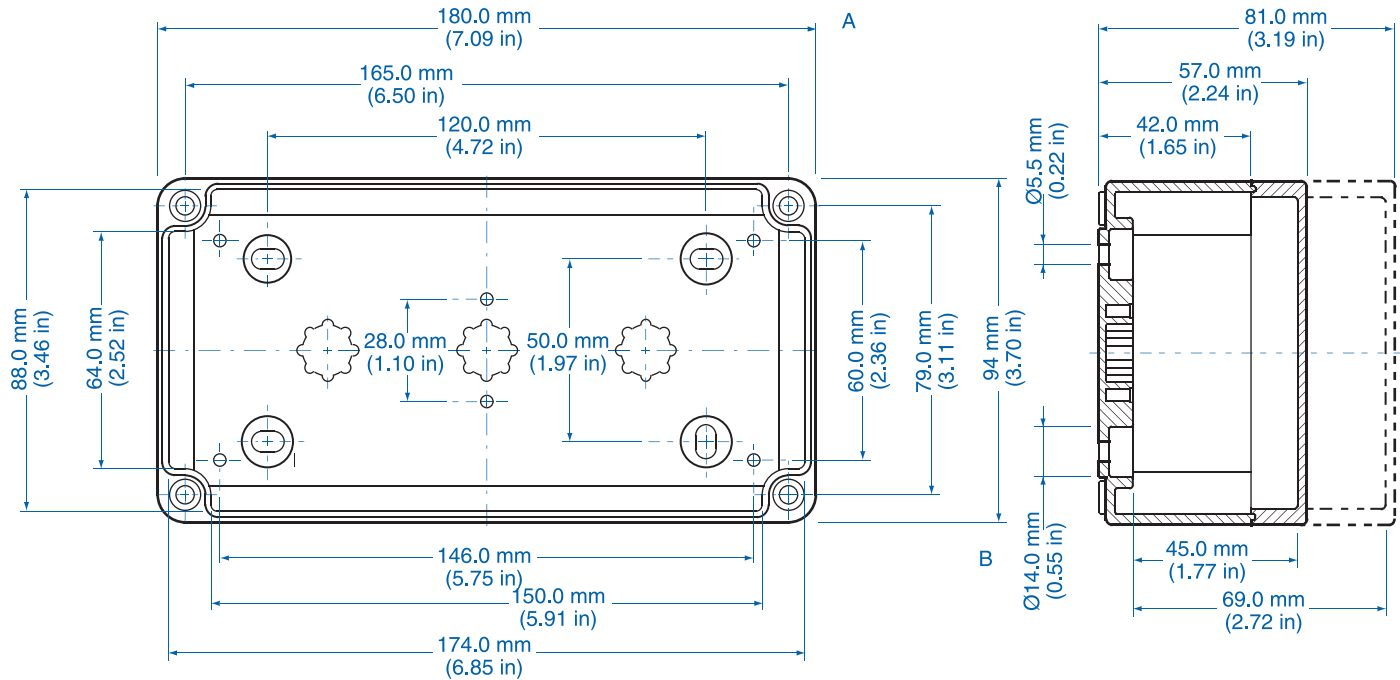


Knockout Positions


Side A

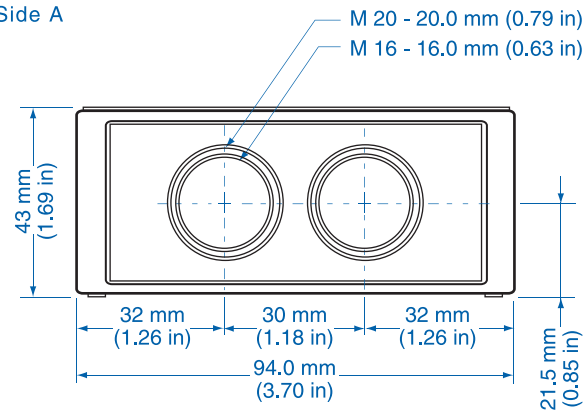

Side B

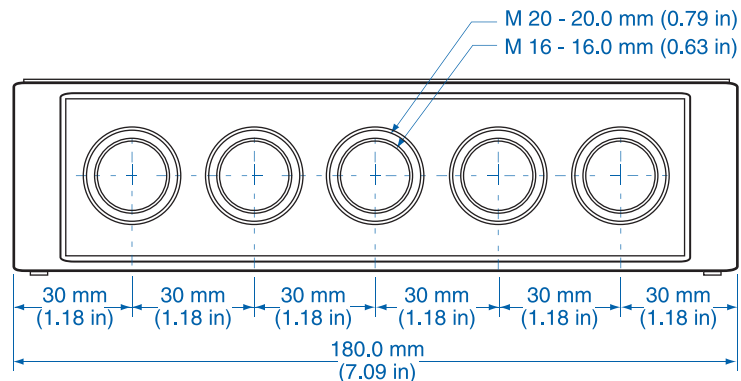


Dimensions

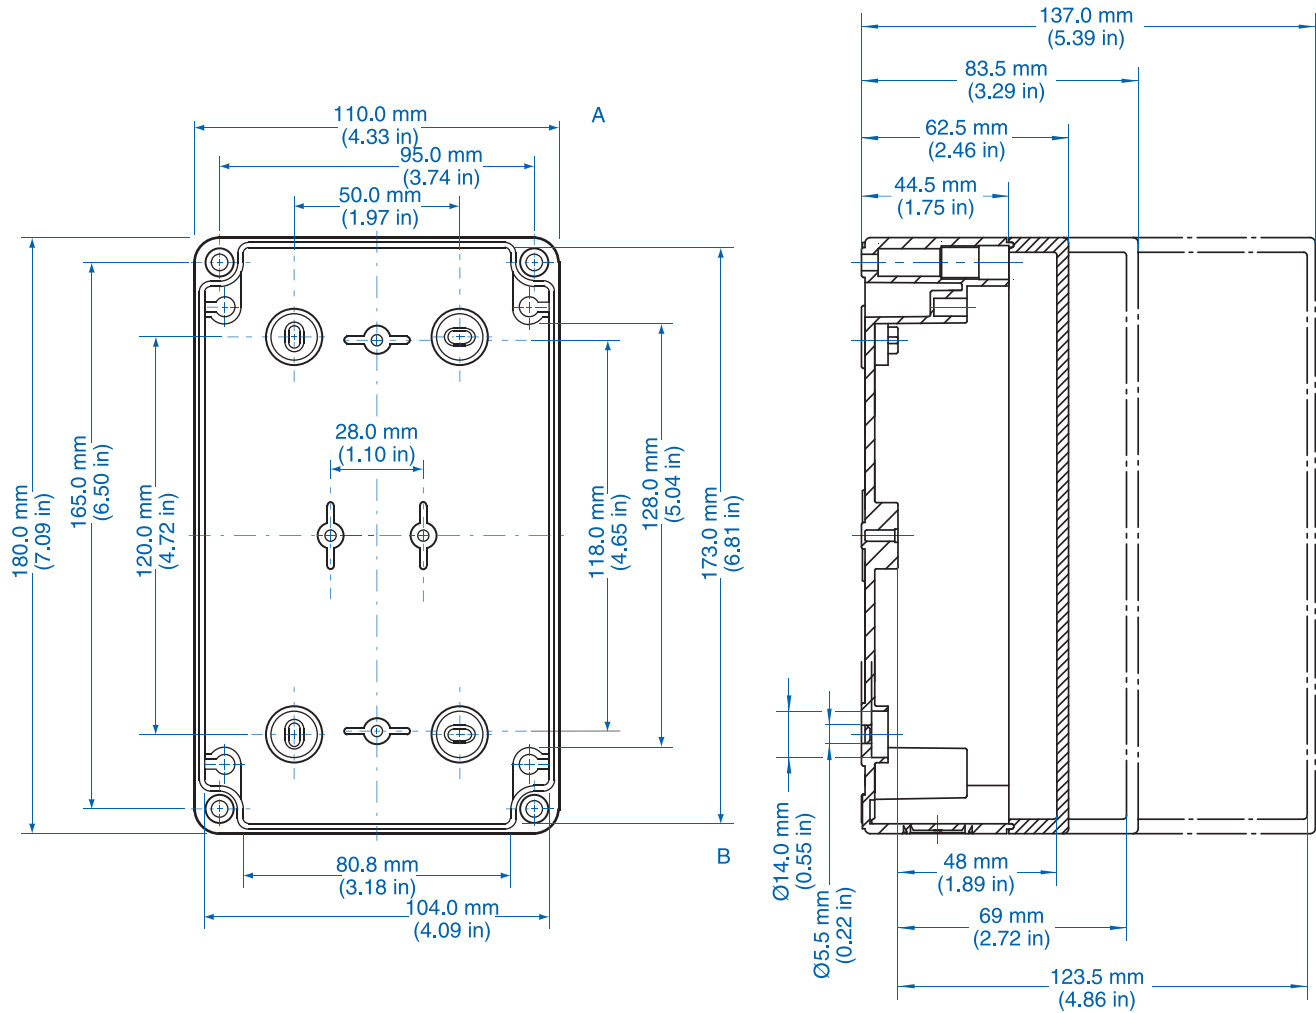


Knockout Positions


Side A

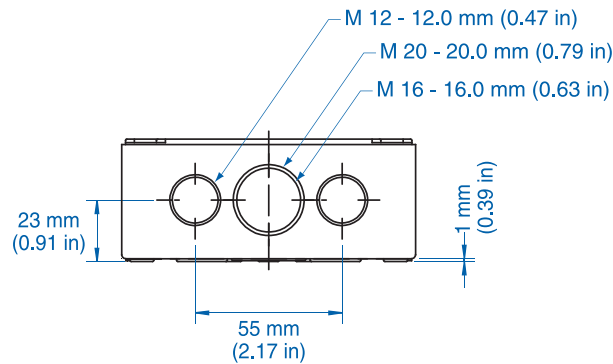


Side B

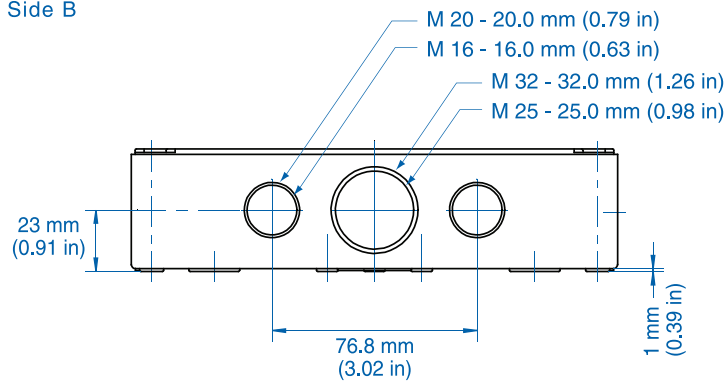


Dimensions

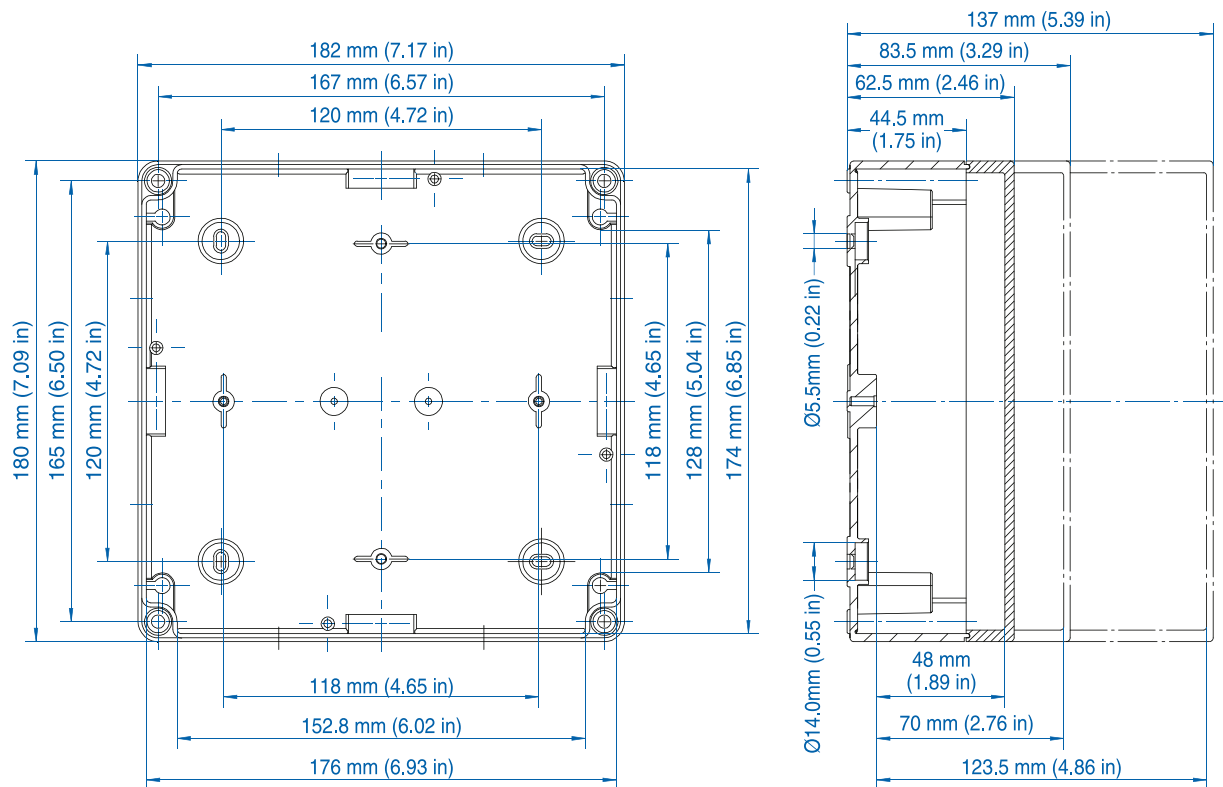

Knockout Positions

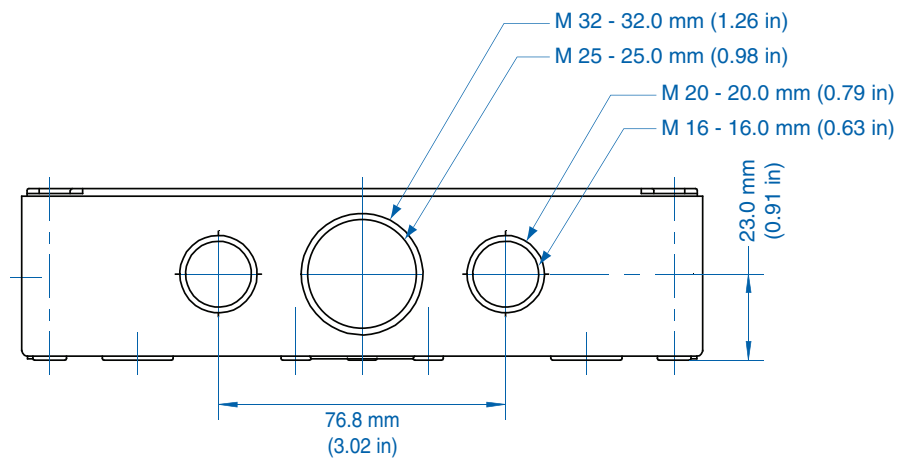


Dimensions

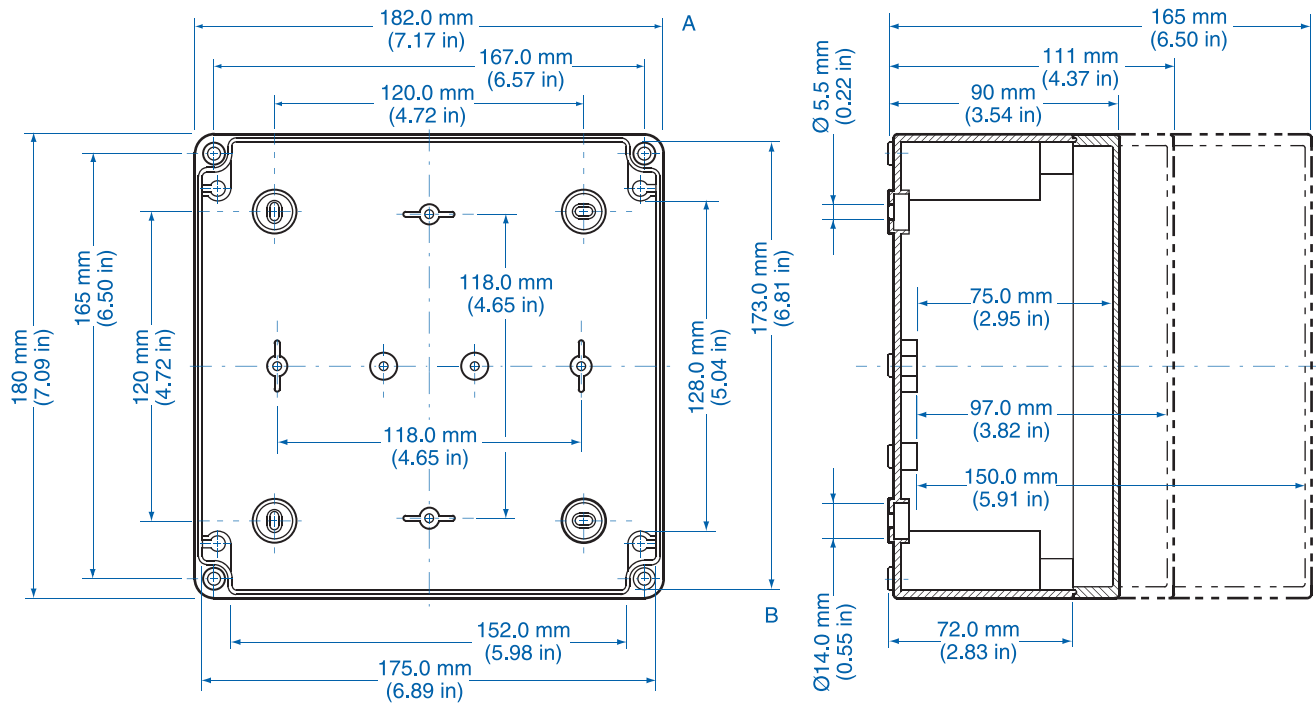


Knockout Positions


Side A

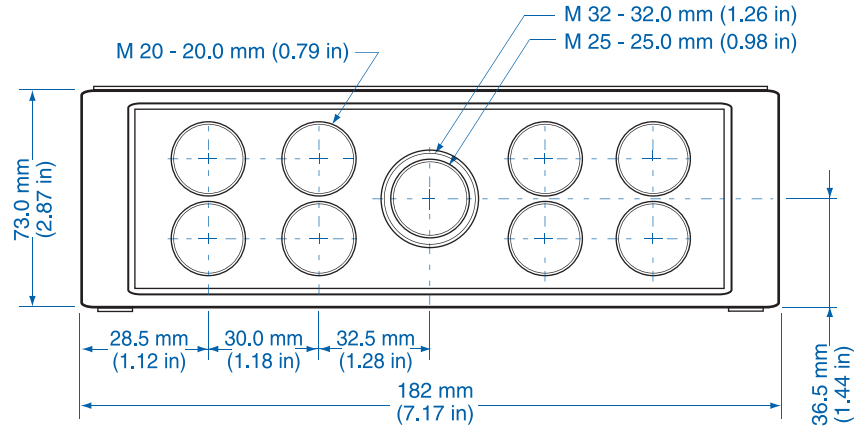

Side B

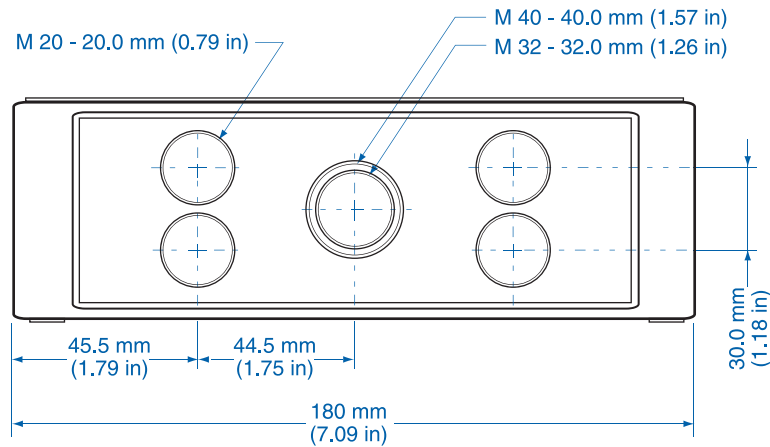

Dimensions

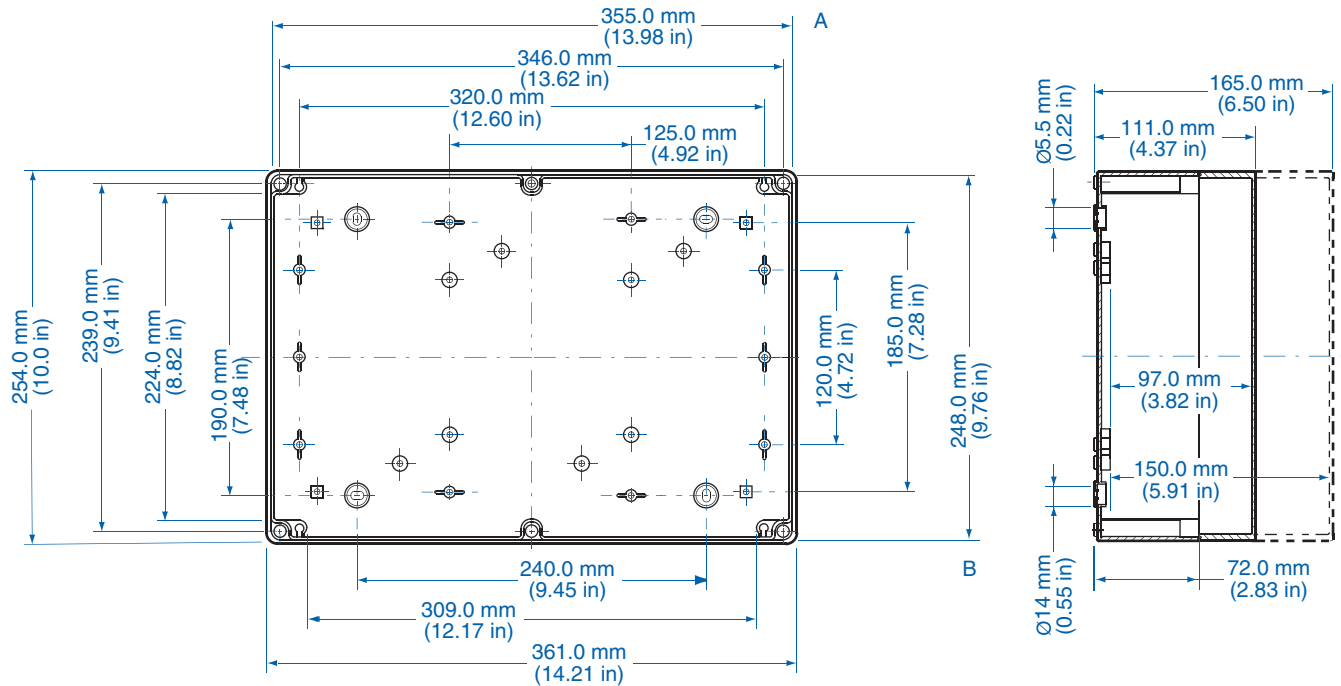

Knockout Positions

