

PATLITE[®]
New Frontiers in Safety, Security and Comfort.

Bright and Affordable



Automation Machinery



Control Cabinet



Printing Industry



LED Bar Light

CWA

Line up

6500K IP65



L:900mm

L:600mm

L:300mm

Mounting Brackets



Standard

2 incl. For 3S

3 incl. For 6S

4 incl. For 9S

Material: Stainless Steel

Holding Brackets







Standard

2 incl. For 1 type


Material: Stainless Steel

Highly-reliable LED chips are used

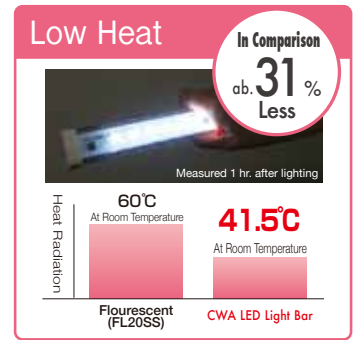


Specifications & Outer Dimensions (Unit: mm)


Model	CWA3S-24-CD	CWA6S-24-CD	CWA9S-24-CD
Luminous Color		Daylight	
Color Temperature (Typ.)		6500K	
Illuminance (at 24V DC, 0.5m)	440lx	800lx	990lx
Total Luminous Flux	350lm	700lm	1050lm
Rated Voltage	24V DC (Polarized)		
Operating Voltage	24V DC ±10%		
Current Consumption	180mA	360mA	540mA
Power Consumption	4.32W	8.64W	12.96W
Operating Temperature Range	-30°C ~ +60°C (RH90% or less, no condensation)		
Main Body Material	Polycarbonate Resin (Waterproof Packing: Silicon)		
Protection Rating	IP65 (Excluding cable ends)		
Mounting Location	Indoor		
Mounting Direction	Any Direction		
Insulation Resistance	500V DC 5MΩ or more		
Withstand Voltage	500V AC for 1 minute (Between power cable lead and screw.)		
Vibration Resistance	30Hz 19.6 m/s ² (Back and Forth, Up and Down, Left and Right for 2 hrs. each)		
Mass	215g ±10%	385g ±10%	540g ±10%



CWA9S-24-CD



CWA6S-24-CD



CWA3S-24-CD

Model Code **CWA3S-24-CD**

Model

Color(CD): Daylight

Rated Voltage(24): 24V DC

Light Unit Length:(3):300mm (6):600mm (9):900mm

PATLITE Corporation

International Sales Division

4-4-25, Hommachi, Chuo-ku, Osaka-shi, 541-0053 Japan TEL: +81-6-7711-8953 FAX: +81-6-7711-8961

PATLITE (U.S.A.) Corporation

20130 S. Western Ave. Torrance, CA 90501, U.S.A. TEL: +1-310-328-3222 FAX: +1-310-328-2676

PATLITE (SINGAPORE) PTE LTD

No.2 Leng Kee Road, #05-01 Thye Hong Centre, Singapore 159086 TEL: +65-6226-1111 FAX: +65-6324-1411

PATLITE (CHINA) Corporation

Room 1102-1103, No.55, Lane 777, Guangzhong Road (West), Zhabei District, Shanghai, China 200072 TEL: +86-21-6630-8969 FAX: +86-21-6630-8938

PATLITE Europe GmbH

Am Soeldnermoos 8, D-85399 Hallbergmoos, Germany TEL:+49-811 9981 9770-0 FAX:+49-811 9981 9770-9

PATLITE KOREA CO., LTD.

A-2603, Daesung-D-POLIS, 543-1 Gasan-dong, Geumcheon-gu, Seoul, 153-719 TEL:+82-2-523-6636 FAX:+82-2-861-9919

PATLITE TAIWAN CO., LTD.

7F. No. 91, Huayin St, Datong District Taipei, Taiwan R.O.C TEL:+886-(0)2-2555-1611 FAX:+886-(0)2-2555-1621

<http://www.patlite.com> E-mail: overseas@patlite.co.jp

●"PATLITE", or the PATLITE logo are registered trademarks of the PATLITE Corporation.



PATLITE ECO PROJECT
For the benefit of mankind and the earth, Patlite is committed to developing environmentally friendly products.

CAUTION

To ensure correct use of these products, read the "Instruction Manual" prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Specifications are subject to change without notice.

1290C

1508