

# RLE

## Revolving Warning Light

RLE



Optional Rubber Gasket SZ-200A



LED

IP65 (with SZ-200A)

Ø82

## LED Signal Light featuring energy-saving and enhanced illumination with an LED integrated reflection system.

### FEATURES

- Indoors allows upright, inverted, and horizontal installation; outdoors allows upright installation only.
- Dome lens is made of superior impact and heat resistant polycarbonate resin.
- Compact motor with high durability and energy-efficient characteristics.
- LED integrated reflection system for enhanced illumination.
- Energy-efficient and maintenance-free LED array
- Main body is made of impact and heat resistant ABS resin.
- Colors available are Red, Amber, and Green.

### Specifications


Model	Rated Voltage	Power Consumption	Flash Rate (fpm)	Mass
⊙ RLE-12	DC 12V	1.7W	120	400g
RLE-24	DC 24V	3.9W		
RLE-100	AC 100V	2W		
RLE-220	AC 220V			

⊙ Available by Special Order


### How to Order

Model	Color
RLE - [ ]	R: Red Y: Amber G: Green B: Blue
Rated Voltage	
12 : DC 12V	
24 : DC 24V	
100: AC 100V	
200: AC 200V	

### Dimensions

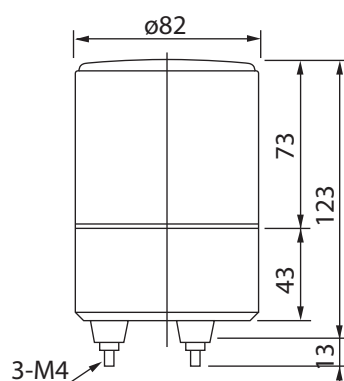

### Mounting Dimensions

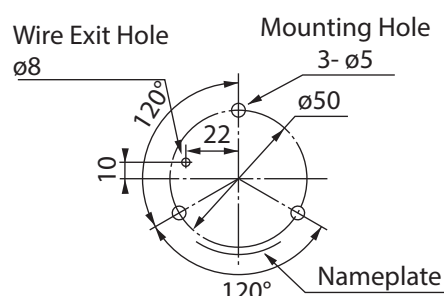

(Unit: mm)