

170/172-Series

Pushbutton Switches

The 170/172-Series pushbutton switches are single pole, high amperage switches suitable for shallow back panel applications. These switches are momentary action and require an actuation force of 2.5 lbs. The 170/172-Series switches are equipped with a slow-make, slow-break contact mechanism and are rated at 15 amps at 125VAC.



Carling Technologies®

Innovative Designs. Powerful Solutions.

Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.
60 Johnson Avenue • Plainville, CT 06062-1177
Phone: (860) 793-9281 • Fax: (860) 793-9231
Email: sales@carlingtech.com • www.carlingtech.com

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts

Electrical Life

25,000 cycles - Momentary

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)

172 - **CBL**

1 Base Part Number 2 Cap Style/Color

1 BASE PART NUMBER: SERIES/POLES/CIRCUITRY/ RATING/TERMINATION
10A 250VAC; 15A 125VAC


Single Pole	Solder Lug	Wire Leads	Screw Terms.
On-(Off)	170-B	170-A	170
Off-(On)	172-B	172-A	172

2 CAP STYLE/COLOR¹

CBL	Black Plastic
CGN	Green Plastic
CRD	Red Plastic
CWH	White Plastic

Notes:

- 1 When selection 2 is left blank, a standard nickel plated plunger is supplied.
- () Indicates momentary function.

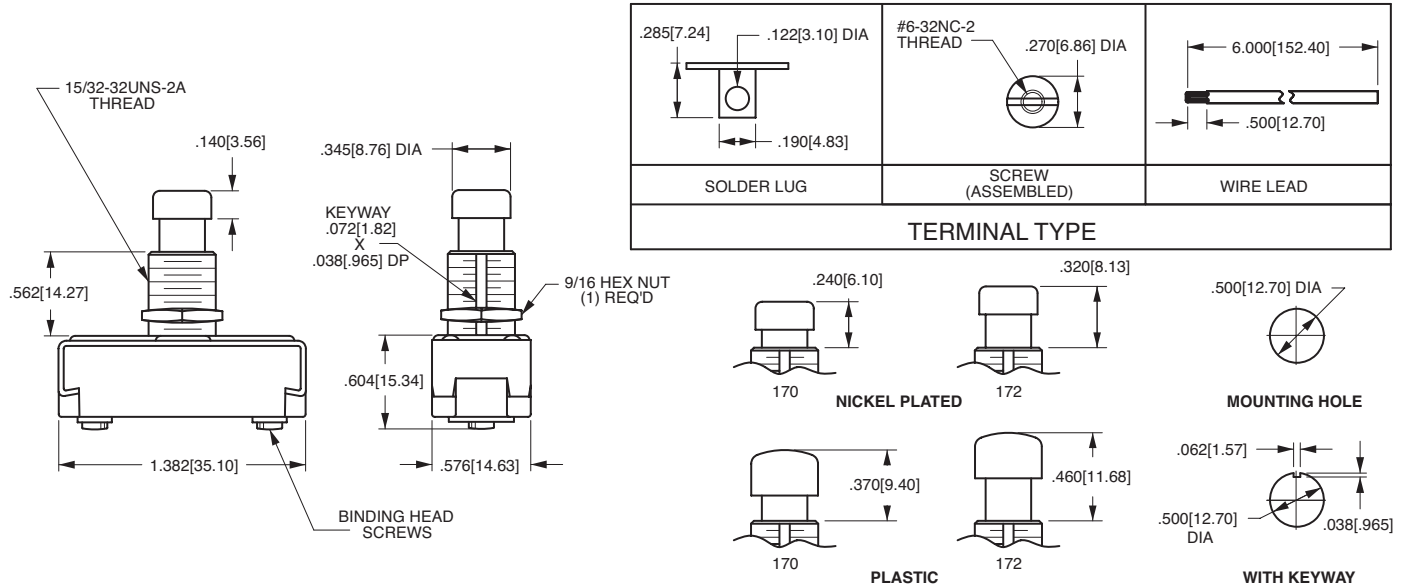

*Manufacturer reserves the right to change product specification without prior notice.