


LD01101

CPB120-24D-36

SPECIFICATIONS

- Input:** 120 Vac 60Hz, 45VA, Input Fuse 1A
- Output:** Rated 24 Vdc @ 1.5A Max. 36W / 24 Vac @ 1.5A
DC output is adjustable 1.2 Vdc to 28 Vdc Max by use of an on-board potentiometer
Max output current is limited to $I_{out} = 1.5 \cdot V_{out} / 24$
Attempts to draw excess output current may result in overheating and unintended shutdown of the unit
- Feature:**
Max combined AC & DC output current 1.5A; DC internally limited
Provides a single power source for the entire system
Output DC Short Circuit protection fully automatic
Allows use of AC and DC simultaneously
Output fuse protects unit from accidental ground faults
Fused input protects transformer primary
Internal Thermal overload protection
DC Mode Selection. Full or Half Wave
Fits Standard 2.75" Snap-Trak® for easy mounting

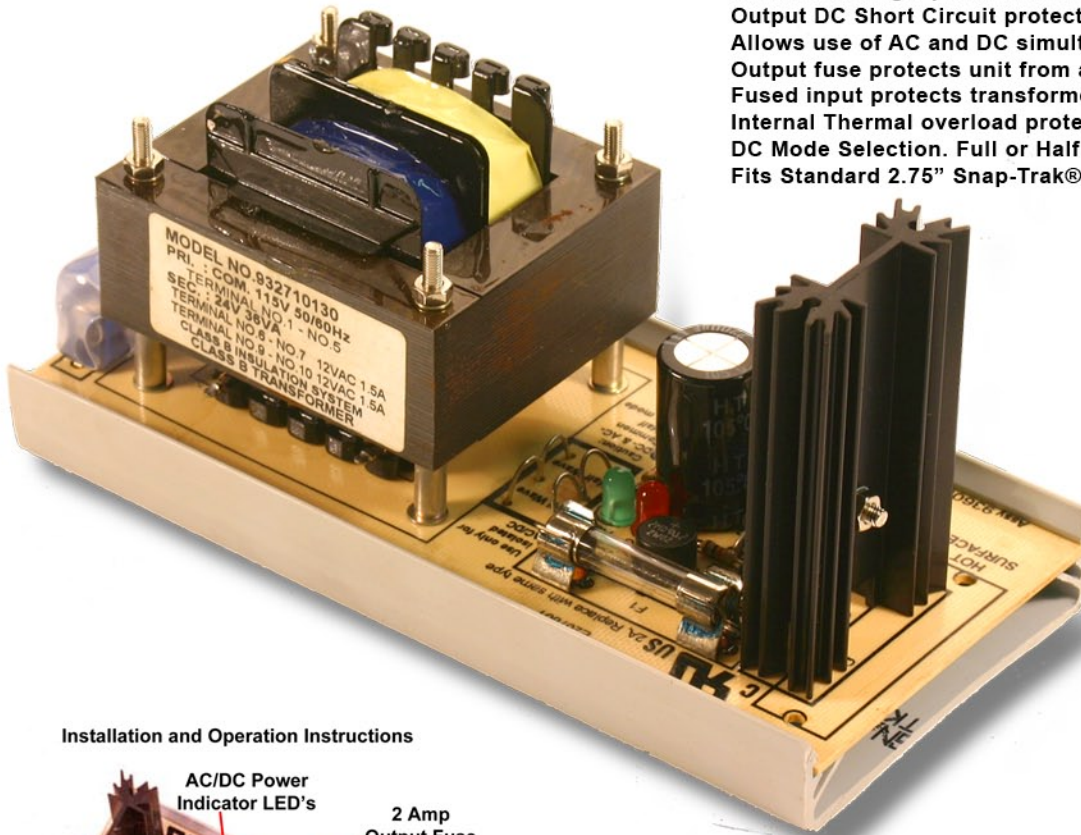

Installation and Operation Instructions

