


## LD02100

## CPS120-024-100

The UL Listed CPS120-024-100 Power Supply is a sturdy self-contained power source rated @ 96VA. It provides simple power connections and has an illuminated control switch on the 24V output, which is fitted with a protective circuit breaker. The unit also provides a convenient unswitched 120V power point and is installation ready.

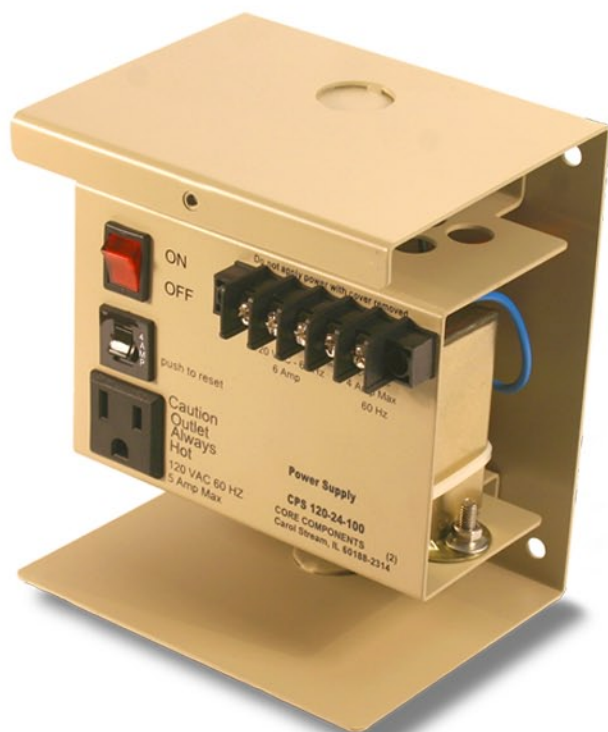

- FEATURES**
- UL Listed to meet code requirements
  - 96VA load capacity
  - Output On/Off control switch
  - Breaker protected 24 Vac Output
  - Simple power connections
  - Useful 120 Vac convenience outlet
  - Installation ready

### SPECIFICATIONS

Input:	120 Vac, 60 Hz, 6 Amp max (1 Amp max used by 24V supply)
Output:	24 Vac, 60 Hz, 4 Amp max continuous 120 Vac, 60 Hz, 5 Amp max at convenience outlet (unswitched)
Protective Device:	24 Vac supply with 4 Amp resettable thermal circuit breaker 120 Vac supply, none
Controls:	Double pole switch with power indicating lamp, fitted on the 24V transformer. 120V convenience outlet power uncontrolled
Connections:	One 5 position terminal block with combination head screws and wire clamps. Provided connection for 120 Vac input, 24 Vac output and safety ground
Enclosure:	Three piece steel enclosure, with four 1/4" mounting holes, and standard 7/8" top and bottom knockouts. Removable outer cover fitted with an indicator lamp 'peephole', and a removable control switch access plate.
Dimensions:	6-1/8" H x 5-1/4" W x 4-1/4" D
Operating Temp:	-15°F to 140°F (-25°C to 60°C)
Weight:	6.10 lbs (2.8 kg)
Standard Accessories:	Instruction / Installation sheet, Warranty Card
Safety Approvals:	UL Listed for the US and Canada, UL File # E207801

